



Davidson Traffic Control Products

Options and Instructions for The "Brick" Channelizing Marker



The Brick, the RPM and FG300 in a typical 2-way 2-lane detour

The "Brick" Channelizing Raised Pavement Markers

The "Brick" Channelizing Markers have been designed to aid in channelizing traffic in two lane/two way construction zones. In conjunction with flexible posts, the markers act as a control device effective both day and night. The amber housing is easily visible in daytime and the twin reflectors make it very bright at night.

Recommended Applications:

The "Brick" Channelizing Markers can be used in temporary construction zones, permanent installations-in non-snow

states, can be used in Gores, Islands or any location which requires channelizing of traffic.

Application:

1. Apply hot melt bituminous adhesive, butyl pad or 2-part epoxy where marker is to be placed.
2. Place marker on the spot desired and apply pressure for five (5) seconds. Traffic must not be allowed to run over markers until adhesive has set.
3. Always place markers so that reflective lens is facing oncoming traffic.

Important Notice To Purchaser

The following is made in lieu of all warranties, expressed or implied, including the implied warranties of merchantability and fitness for purpose: Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective. Before using, user shall determine the suitability of the product for its intended use, and user assumes all risk and liability whatsoever in connection therewith. Neither manufacturer nor seller shall be liable either in tort or in contract for any loss or damage, direct, incidental, or consequential, arising out of the use of or the inability to use the product.



"Creating Products to Save Lives"



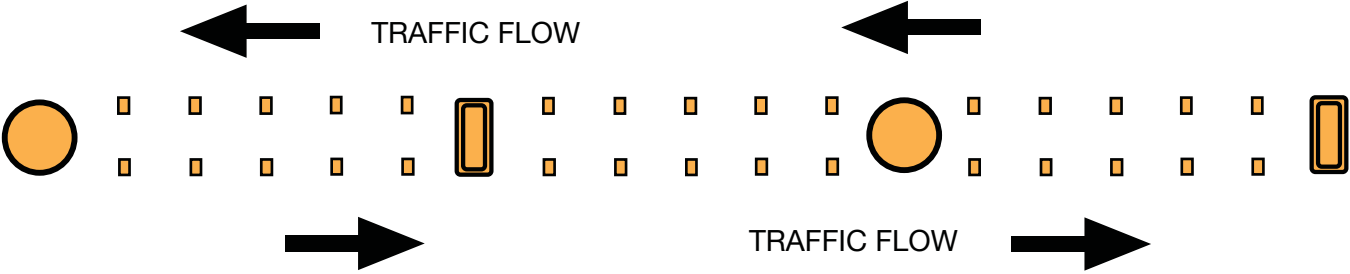
Specifications for The “Brick”[™] Channelizing Marker



The Davidson “Brick” Channelizing Marker is a raised reflective marker designed for use in conjunction with the **Flexi-Guide FG 300[®] series Channelizer post** for 2-lane / 2-way construction zones.

The “Brick” provides both day and night delineation for effective separation of traffic in opposing directions.

Specifications for the “Brick” shall be as follows:

SPECIFICATIONS	
• Marker Size:	2.5” x 7.5” x 13” (65mm x 100mm x 300mm)
• Marker Body:	Impact-resistant thermoplastic ABS
• Reflective Lens:	Methyl-Methacrylate Acrylic 3.5" (14cm)
• Reflector Size:	0.5” x 3.75” (1.88 in) (15mm x95mm (1425) ₂) ₂ each.
Two (2) reflectors standard per side, 3.75in (28.5cm)	



Key:  FG 300 Post  The “Brick” channelizing marker  RPM or Halftrack work zone pavement markers



Davidson Traffic Control Products

"Creating Products to Save Lives"

3110 70th Avenue East • Tacoma, WA 98424 / (877) 335 4638
 e-mail: hwysales@pexco.com • DavidsonTraffic.com

