


# FG 103 Post Driver System

For use with Pexco's FG 400 and 500 Series Posts with Steel Anchors

## FG 103 Post Driver

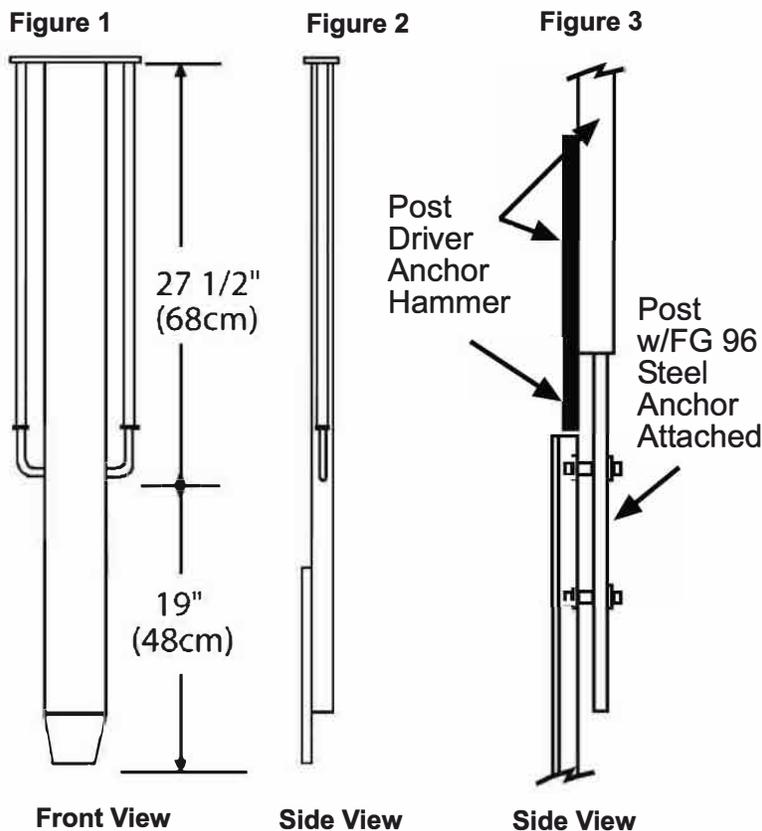

1. Place the delineator post with steel anchor attached into the FG 103 Driver. See Figure 3 to the left.

2. Holding the FG 103 with the post inside, position the steel anchor at the desired installation location. Ensure the post is perpendicular to the traffic flow. Grasp the handles and slide the FG 103 up and down, striking the anchor hammer against the top of the steel anchor.

3. Repeat the process until the post is driven to the proper depth.

Flexi-guide 400 and 500 delineator posts with a 12" or 18" U-Channel Anchor can be installed using various power driver tools, including gas powered, pneumatic and electric demolition hammers.

### Using the FG 103 Post Driver with FG 96 Steel Anchor (SA)

The FG 103 is designed for use with a 1.12 # / ft. steel U-Channel Anchor. It eliminates the need for pilot hole and allows the post to be driven into compacted and rocky soils.

Ensure the steel anchor is driven 2-3 inches below the ground surface. For best performance, do not leave steel anchor at or above grade.