

SAFETY TOP CAP™ FENCE PROTECTION



Specifications

Design: The durable and flexible plastic in a large unique tubular shape, allows the Safety Top Cap to fit securely over the fence's top rail while providing an appealing flat surface on the front of the fence.

Multiple Uses: Primarily used in our safety yellow color for baseball outfields. This product is also growing in popularity at athletic fields, parks, playgrounds, and recreational facilities throughout the country.



COLORS:*

Safety Yellow

Safety Yellow is our standard (stocking) color, however, Safety Top Cap™ can also be special ordered in our standard fence slat colors and Scarlet Red upon request - minimum order quantities apply.

Safety Top Cap™ is our premium sports fencing protection product.

The unique design provides protection against bodily injury by covering the exposed knuckles or barbs on top of a chain link fence. It also increases visibility of the fence for player safety while acting as a decorative trim piece to enhance any galvanized or colored chain link fence system.

Comes conveniently cut in 8' lengths, and unlike some economy fence cap products, requires no special tools for installation.

Don't settle for competitive designs and styles that pose an installation challenge, do not blend with the natural contours on the top of the fence, nor offer our impressive, long-term warranty.

Safety Yellow

White

Black

Brown

Scarlet Red

Green

Royal Blue



PRODUCT TYPE	CAP HEIGHT	CAP WIDTH	CAP LENGTH	CONTENTS PER BAG	APPROX. COVERAGE PER BOX	BAG WEIGHT
Safety Top Cap™	5½"	2¾"	8'	5 Top Caps • 15 Hog Rings	40 linear feet	20 lbs

QUALITY MATERIALS

The Safety Top Cap product is extruded from High Density Polyethylene (HDPE), color pigments, and ultra violet (UV) inhibitors, specifically designed to retard the harmful effects of the sun and lengthen the life of the product.

HIGH DURABILITY

Manufactured using Pexco PDS® HDPE plastic with UV stabilizers. This product is designed to endure high impact, to resist the harmful effects of the sun, and withstand severe weather conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates, and common environmental pollutants.


EASY MAINTENANCE

Pressure cleaning of surface contaminants is quickly accomplished with plain water.



INSTALLATION INSTRUCTIONS

Wall Thickness: .070" Reference

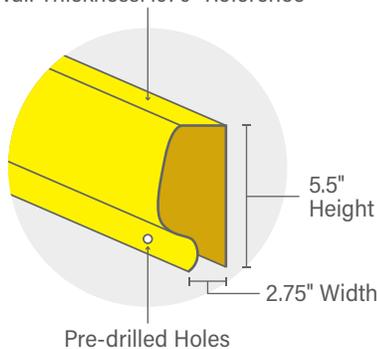

STEP 1:

Simply "snap" over the top of the fence and lock to the wire mesh with steel hog-rings (included with each package) through the pre-drilled holes on each piece.

SECURITY:

Resist vandalism by using the hog rings to permanently attach the Safety Top Cap to the fence.

HDPE TECHNICAL PROPERTIES

Melt Index

(.35) Optimum extrusion processing conditions for Fence Slats

Density

(.945) Polyethylene ranges anywhere from .914 to .960 in density

Minimum Temp.

(-70°) Under no stress, HDPE remains flexible at this temperature

Maximum Temp.

(180°) Under no stress, HDPE will not distort at this temperature

Tensile Strength

(4,000 psi) HDPE will not distort at lesser loads or impacts

* Exact representation of slat colors in printing is difficult. Please refer to actual color samples for final matching.

Covered by one or more of the following patents: US Patent **6,068,243 / 5,165,664 / 5,234,199**

** Safety Top Cap carries a 15-year, pro-rata warranty against breakage under normal conditions. Write Pexco for full warranty information.

Wind Load Disclaimer: Pexco will not be responsible for damage due to wind load conditions resulting from insufficient structural support.